

TECHNICAL DATA SHEET

GAS-FLO 3/8" NATURAL GAS / PROPANE GAS OUTLETS (NGO-3)

Applications:



PART No.: NGO-3 (Stainless Steel Cover)

- STAINLESS STEEL OUTLET COVER.
- 3/8 C.S.A. CONVENIENCE OUTLET (VALVE WITH COUPLER).
- APPLIANCE ATTACHMENT (NIPPLE).
- OUTLET DUST PLUG.

THERMAL PROTECTION DEVICE
SHUTS OFF FLOW OF GAS AT +250°F, +121°C

Natural Gas CSA Rated 75,000 BTU/H @ .6" wc Pressure Drop.
Propane Gas CSA Rated 100,000 BTU/H @ .6" wc Pressure Drop.

PART No.	Description
NGO-3	Gas Outlet with Stainless Cover
NGO-3HT	Stainless - With Hanger Tab Rack Package
NGO-3-BOX	Stainless Cover Only




Overall
Dimensions of NGO-3
OUTLET COVER
measures:
6-1/4" H x 3-1/2" W x 2-1/2" D



NGO-3HT
With Hanger
Tab



PART No.	Description
NG-OUTLET-NCN	Gas Outlet with Stainless Cover (No Coupler or Nipple)

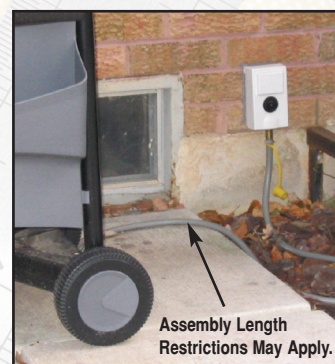

Barbecue Assemblies Sold Separately

CAUTION: Gas Outlets are to be installed by Licensed Gas fitters only.